


Where we are:

Chap 2	Configuration Space
Chap 3	Rigid-Body Motions
Chap 4	Forward Kinematics
Chap 5	Velocity Kinematics and Statics
Chap 6	Inverse Kinematics
Chap 8	Dynamics of Open Chains
	8.1 Lagrangian Formulation
	8.2 Dynamics of a Single Rigid Body
Chap 9	Trajectory Generation
Chap 11	Robot Control
Chap 13	Wheeled Mobile Robots

Important concepts, symbols, and equations

dynamics of a rigid body: $\mathcal{F}_b = \begin{bmatrix} m_b \\ f_b \end{bmatrix} = \begin{bmatrix} \mathcal{I}_b \dot{\omega}_b + [\omega_b] \mathcal{I}_b \omega_b \\ \mathbf{m}(\dot{v}_b + [\omega_b] v_b) \end{bmatrix}$

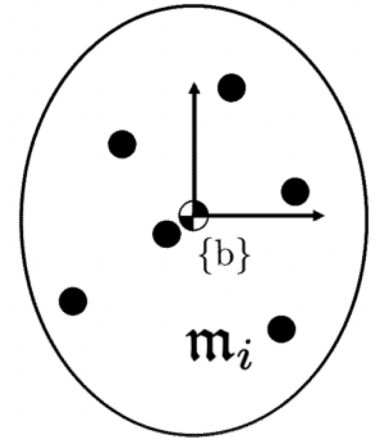

$$\mathcal{I}_b = \begin{bmatrix} \sum m_i (y_i^2 + z_i^2) & -\sum m_i x_i y_i & -\sum m_i x_i z_i \\ -\sum m_i x_i y_i & \sum m_i (x_i^2 + z_i^2) & -\sum m_i y_i z_i \\ -\sum m_i x_i z_i & -\sum m_i y_i z_i & \sum m_i (x_i^2 + y_i^2) \end{bmatrix}$$

$$= \begin{bmatrix} \mathcal{I}_{xx} & \mathcal{I}_{xy} & \mathcal{I}_{xz} \\ \mathcal{I}_{xy} & \mathcal{I}_{yy} & \mathcal{I}_{yz} \\ \mathcal{I}_{xz} & \mathcal{I}_{yz} & \mathcal{I}_{zz} \end{bmatrix}$$

inertia matrix

symmetric, positive definite

$$(x^T \mathcal{I}_b x > 0 \text{ for all } x \neq 0)$$

$$\mathcal{I}_{xx} = \int_{\mathcal{B}} (y^2 + z^2) \rho(x, y, z) dV$$

$$\mathcal{I}_{xy} = - \int_{\mathcal{B}} xy \rho(x, y, z) dV$$


$$\mathcal{I}_{yy} = \int_{\mathcal{B}} (x^2 + z^2) \rho(x, y, z) dV$$

$$\mathcal{I}_{xz} = - \int_{\mathcal{B}} xz \rho(x, y, z) dV$$

$$\mathcal{I}_{zz} = \int_{\mathcal{B}} (x^2 + y^2) \rho(x, y, z) dV$$

$$\mathcal{I}_{yz} = - \int_{\mathcal{B}} yz \rho(x, y, z) dV$$

Important concepts, symbols, and equations (cont.)

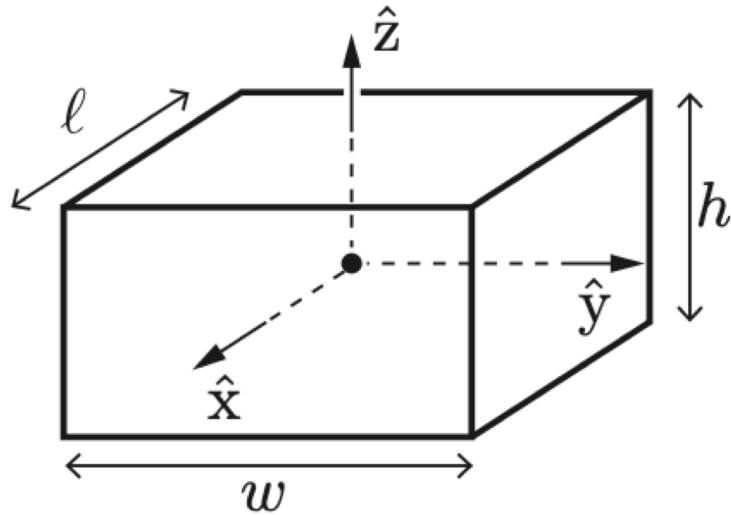


rectangular parallelepiped:

$$\text{volume} = hlw,$$

$$\mathcal{I}_{xx} = m(w^2 + h^2)/12,$$

$$\mathcal{I}_{yy} = m(\ell^2 + h^2)/12,$$

$$\mathcal{I}_{zz} = m(\ell^2 + w^2)/12$$

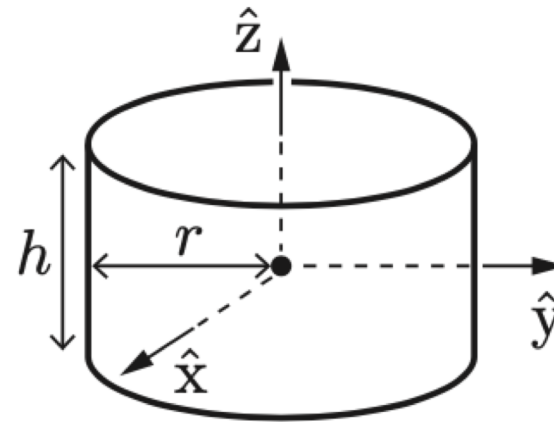


circular cylinder:

$$\text{volume} = \pi r^2 h,$$

$$\mathcal{I}_{xx} = m(3r^2 + h^2)/12,$$

$$\mathcal{I}_{yy} = m(3r^2 + h^2)/12,$$

$$\mathcal{I}_{zz} = mr^2/2$$

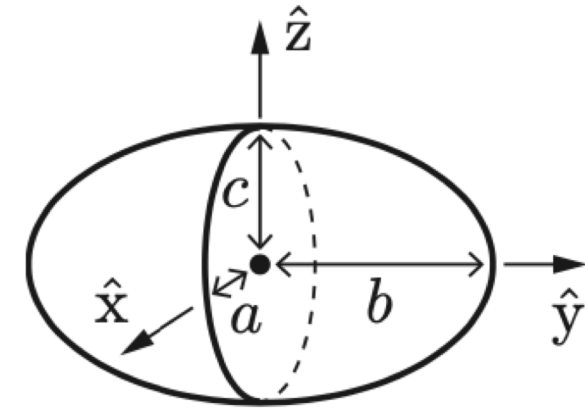

ellipsoid:

$$\text{volume} = 4\pi abc/3,$$


$$\mathcal{I}_{xx} = m(b^2 + c^2)/5,$$

$$\mathcal{I}_{yy} = m(a^2 + c^2)/5,$$

$$\mathcal{I}_{zz} = m(a^2 + b^2)/5$$


Important concepts, symbols, and equations (cont.)

kinetic energy of a rotating body: $\mathcal{K} = \frac{1}{2} \omega_b^T \mathcal{I}_b \omega_b$

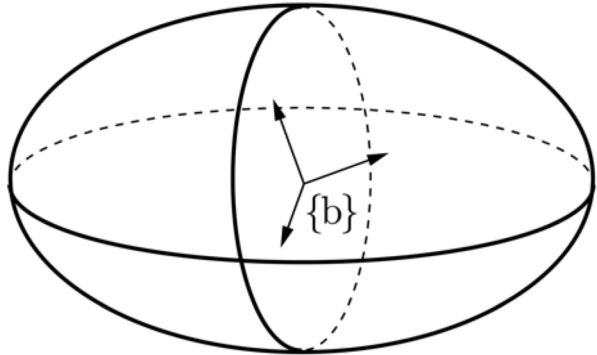

$$\mathcal{I}_b = \begin{bmatrix} \mathcal{I}_{xx} & \mathcal{I}_{xy} & \mathcal{I}_{xz} \\ \mathcal{I}_{xy} & \mathcal{I}_{yy} & \mathcal{I}_{yz} \\ \mathcal{I}_{xz} & \mathcal{I}_{yz} & \mathcal{I}_{zz} \end{bmatrix}$$

e-vals: $\lambda_1, \lambda_2, \lambda_3$
e-vecs: v_1, v_2, v_3

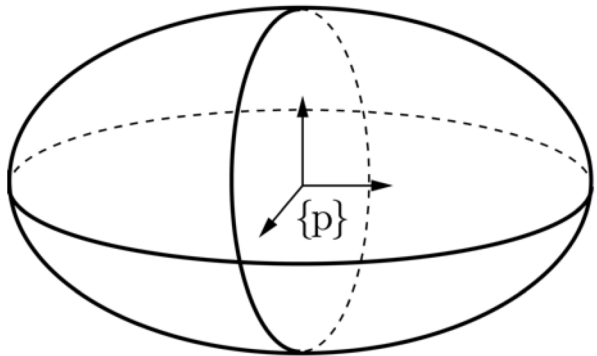

$$\mathcal{I}_p = \begin{bmatrix} \lambda_1 & 0 & 0 \\ 0 & \lambda_2 & 0 \\ 0 & 0 & \lambda_3 \end{bmatrix}$$

**principal moments
of inertia**


for coordinate axes along v_1, v_2, v_3 ,
the **principal axes of inertia**

Important concepts, symbols, and equations (cont.)

The inertia matrix of a compound body is the sum of their inertias when expressed in a common frame.

Frame at different orientation:

$$\begin{aligned} \frac{1}{2}\omega_c^T \mathcal{I}_c \omega_c &= \frac{1}{2}\omega_b^T \mathcal{I}_b \omega_b \\ &= \frac{1}{2}(R_{bc}\omega_c)^T \mathcal{I}_b (R_{bc}\omega_c) \\ &= \frac{1}{2}\omega_c^T (R_{bc}^T \mathcal{I}_b R_{bc}) \omega_c \end{aligned}$$

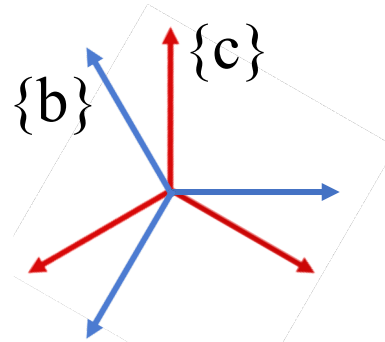


$$\mathcal{I}_c = R_{bc}^T \mathcal{I}_b R_{bc}$$



Aligned frame at q in $\{b\}$ (**Steiner's theorem**):

$$\mathcal{I}_q = \mathcal{I}_b + m(q^T q I - qq^T)$$

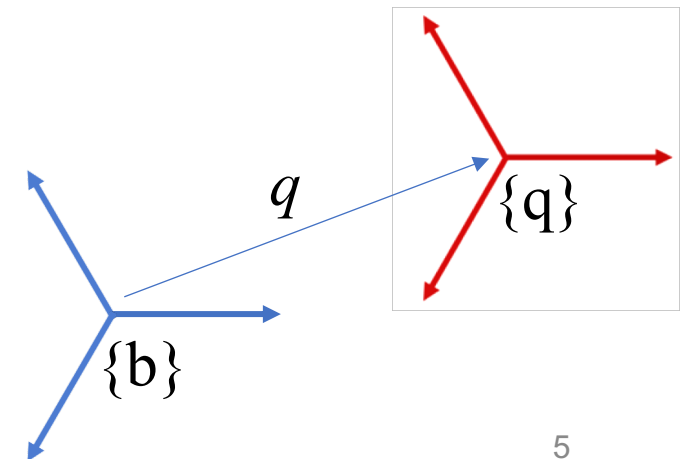

Important concepts, symbols, and equations (cont.)

- **spatial inertia matrix:** $\mathcal{G}_b = \begin{bmatrix} \mathcal{I}_b & 0 \\ 0 & mI \end{bmatrix} \in \mathbb{R}^{6 \times 6}$

- kinetic energy: $\frac{1}{2} \mathcal{V}_b^T \mathcal{G}_b \mathcal{V}_b$

- rigid-body dynamics: $\mathcal{F}_b = \mathcal{G}_b \dot{\mathcal{V}}_b - [\text{ad}_{\mathcal{V}_b}]^T \mathcal{G}_b \mathcal{V}_b$


where the “little adjoint” of a twist is $[\text{ad}_{\mathcal{V}}] = \begin{bmatrix} [\omega] & 0 \\ [v] & [\omega] \end{bmatrix} \in \mathbb{R}^{6 \times 6}$

- spatial inertia matrix in a frame $\{a\}$:

$$\mathcal{G}_a = [\text{Ad}_{T_{ba}}]^T \mathcal{G}_b [\text{Ad}_{T_{ba}}]$$

- the form of the dynamics is independent of the frame!

A compound object consists of a uniform-density cylinder and a uniform-density rectangular prism. The mass of the cylinder is 2 kg and the mass of the prism is 1 kg. A frame $\{a\}$ is defined at the center of the cylinder, with the x -axis along the prism and the z -axis vertical.

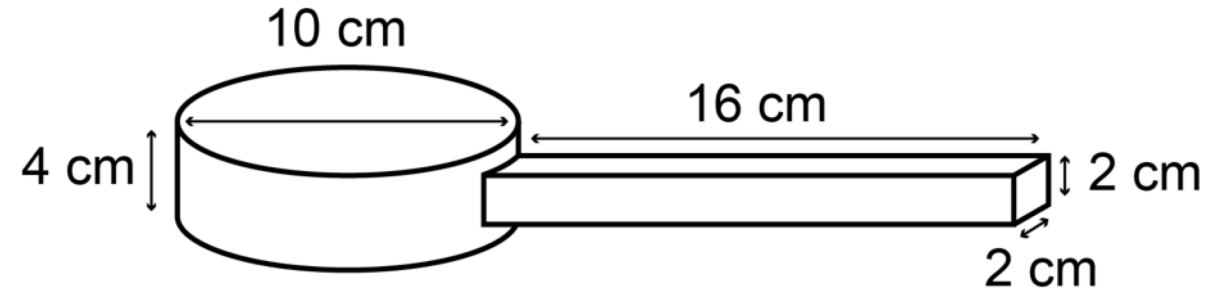

Where is the CM of the compound object in $\{a\}$?

In a frame $\{b\}$ at the CM, aligned with $\{a\}$, what is the inertia of the compound object?

Derive

$$\mathcal{G}_a = [\text{Ad}_{T_{ba}}]^\top \mathcal{G}_b [\text{Ad}_{T_{ba}}]$$

using equivalence of kinetic energy in different frames.